


# Stainless Steel Angle

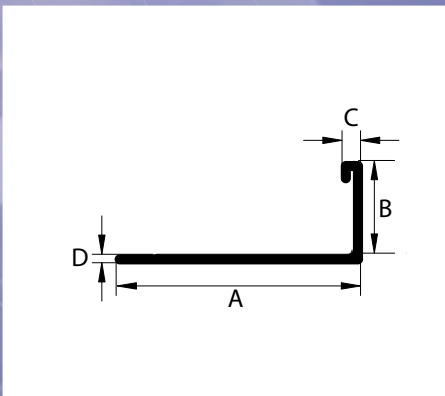

The main purpose for Stainless Steel Angle is to provide protection of tiled surfaces against chipping and wear.

Although similar in purpose to both the Aluminium and Brass Angles, Stainless Steel is used in applications where far superior mechanical and chemical properties are required.

It also provides an attractive finish in installations that include polished fixtures.

Stainless Steel is highly recommended in areas where strict sanitary requirements / regulations are in place (i.e: food preparation areas, hospitals, swimming pool areas etc.) and areas where exposure to strong chemicals is prevalent.

Stainless Steel Angle is roll-formed from 1mm thick steel.

Stainless Steel Angle is available in two grades – Grade 304 which can be used extensively in domestic and some commercial environments, however should be limited only to applications where exposure to water is intermittent, and Grade 316, which can be used in most environments where both exposure to harsh cleaning solutions, and frequent exposure to water occur.

## Stainless Steel Angle - Grade 304 - Available in 3m lengths

B.A.T. Code:	A (mm)	B (mm)	C (mm)	D (mm)
SSA-3-3	24.00	3.00	3.00	1.00
SSA-4-3	24.00	4.50	3.00	1.00
SSA-6-3	24.00	6.00	3.00	1.00
SSA-8-3	24.00	8.00	3.00	1.00
SSA-10-3	24.00	10.00	3.00	1.00
SSA-12-3	24.00	12.50	3.00	1.00
SSA-15-3	24.00	15.00	3.00	1.00
SSA-22-3	24.00	22.00	3.00	1.00

## Stainless Steel Angle - Grade 316 - Available in 3m lengths

B.A.T. Code:	A (mm)	B (mm)	C (mm)	D (mm)
SSAMG-8-3	24.00	8.00	3.00	1.00
SSAMG-10-3	24.00	10.00	3.00	1.00
SSAMG-12-3	24.00	12.50	3.00	1.00